

# MANUAL

## Big stainless steel fanner



# LYSON

**Przedsiębiorstwo Pszczelarskie Łyson**

Spółka z o.o.

34-124 Klecza Górna, st.Pszczela 2, Poland

[www.lyson.eu](http://www.lyson.eu), e-mail; [lyson@lyson.com.pl](mailto:lyson@lyson.com.pl)

Tel. +48 33/875-99-40, +48 33/870-64-02

**The following manual encompasses the devices bearing the following codes:**

W3214

### **Manual**

1. General safety operating principles.
  - 1.1. Electrical safety.
  - 1.2. Operating safety.
    2. Device characteristics.
  - 2.1. Cleaning the pollen.
  - 2.2. Fanner composition.
  - 2.3. Technical data
    3. Controller.
  - 3.1. Controller description
  4. Device storage.
  5. Cleaning and maintenance.
  6. Recycling.
  7. Guarantee



# POLLEN FANNER POWER SUPPLY 230V

Prior to device usage initiation, refer to the following manual and act according to the guidelines contained therein. The manufacturer shall not be held accountable for any damages caused by improper usage of the device or its improper handling

## 1. General safety operational principles.



### 1.1. Electrical safety

- 1) The device should be connected to a socket with earthing with the voltage specified on the nominal plate.
- a) Electric installation must be equipped with RCD having the nominal activation current below 30 mA. The operation of the over-current circuit breaker must be checked periodically .
- b) Check the state of a supply cable periodically. If the supply cable gets damaged, it must be replaced. In order to avoid the threat, it must be performed by a guarantor or by a specialised servicing centre or by an authorised person. Do not operate the honey extractor when a supply or connecting cable are damaged.
- c) In case of any damage to the device, in order to avoid the danger, the repairs may be performed solely by a specialist servicing centre or a qualified person. It is forbidden to pull the power supply cable.
- d) Power supply cable should be kept away from heat sources, Sharp edges and its good state must be taken care of.
- e) Prior to plugging in the device to the mains, check whether controller is switched off. Switch on the controlling panel should be in "0" position . Be careful while connecting the device to the mains. Hands must be dry. Floor on which the device has been placed must be dry!
- f) During the fanner start-up, EMERGENCY STOP button will allow to deactivate the device immediately. Do not displace the fanner during operation.



### 1.2. Operational safety

- a) The following equipment is not intended to be used by persons with limited physical, sensory or mental capabilities (including children) or persons inexperienced or unfamiliar with that type of equipment unless the usage occurs under supervision or in line with the equipment operating manual provided by safety supervising persons.
- b) Protect the controller and the engines against humidity (also during storage)
- c) Do not operate the device in the vicinity of flammable materials.
- d) It is forbidden to perform any maintenance works during

operation.

- e) The device can be activated indoors only. It is not adjusted for outdoor operation.
- f) The device cannot be activated and stored with the ambient temperature below 0° C.
- g) Fanner cannot be activated when the ambient temperature drops below 5° C. When the it has been moved from a room with a lower temperature to a room with a higher temperature, prior to its activation one must wait until the device has achieved the ambient temperature.
- h) All shields must be firmly fixed to the fanner while in operation.



- i) It is forbidden to remove any shields while under operation



- j) It is forbidden to make any repairs while under operation

## 2. Device characteristics

The device is dedicated to separate pollen from impurities. Fanner is entirely made of stainless acid-resistant steel. The device is driven by two motors. The fanner consists of a centrifugal fan and a set of two movable sieves. The sieves are made of mesh with the eye dimension of 3x3 mm.

### 2.1. Pollen cleaning

Pollen must be dried thoroughly prior to the clearing process. Pollen clearing shall be accelerated by the fanner which has a proper design of a propeller generating the air blast to blow out the impurities.

The design of the device allows to regulate:

- operating speed of the sieves
- operational adjustment of the sieves
- propeller speed

### 2.2. Fanner composition

- 1) Fan controller **(F)** and sieve controller **(E)** cables smooth regulation of rotations
- 2) Regulation of sieve location height.**(C)**
- 3) Protection against injuries to be caused by a rotor.
- 4) Centrifugal fan made of four flat blades , dimensions 430x150mm.
- 5) A set of two sieves, dimensions 400x325mm. Reinforced with a mesh made of a stainless steel wire , wire thickness 0,5mm, mesh size 3mm.**(B)**
- 6) Pour in pollen, dimensions 450x450mm.**(D)**
- 7) Fanner lid.**(A)**




### 2.3. Technical data:

-height/width/length	-960/700/1050 mm.
-weight	-65 kg.
-power supply voltage	-230V/50Hz
-fan motor/transmission	-0,12kW / 2700 rpm. -CHM 25 , i=7,5
- sieve motor/ transmission	-0,09kW / 1320rpm. -CHM 25 , i=7,5

### 3. Controller

Controller installed in the fanner makes it possible to regulate the rotations of the fan and sieves smoothly by means of a potentiometer as well as to change the rotation direction by means of green buttons – to the left and to the right. Work termination occurs once the red STOP button has been pressed or by pressing the emergency button

### 3.1. Controller description

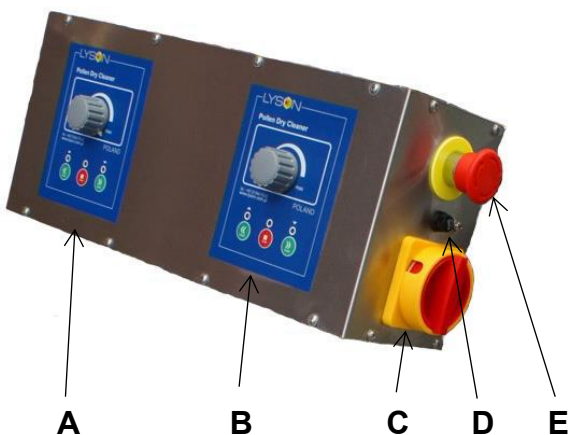

Composition:  
**A**-sieve controller  
**B**- fan controller  
**C**-main switch 230V  
**D**-20 A fuse holder  
**E**- emergency STOP button

### 4. Device storage

When the operating activities have terminated, clean and dry the device thoroughly.

Store in dry rooms in the temperature above 0° C

**Before every season additional technical inspection must be performed and in case any faults are detected a service point must be contacted.**

### 5. Cleaning and maintenance



#### **IMPORTANT!**

**Prior to the maintenance, the plug must be taken out from the mains!**

Prior to the first use, clean and dry the device thoroughly. The device shall be washed with hot water with added agents permissible to be used in food industry.

While cleaning the device, remember to protect electric elements.

After washing, rinse with pure water thoroughly and dry.

The device is to be stored in a dry room.

None of the device components can be maintained with chemical agents.

### 6. Recycling

Worn-out product must be removed as waste only within selective waste collection organised by the Network of Communal Electric and Electronic Waste Collecting Points. A customer is entitled to return the used equipment to the electrical equipment distributor network, at least free of charge and directly, if the device to be returned is of proper type and serves the same purpose as the newly purchased device.

### 7. Guarantee

The products purchased in “Łysoń” company are encompassed by the manufacturer’s guarantee.

The guarantee period equals 24 months

A receipt or a VAT invoice is issued for each product purchased.

Guarantee terms details, see [www.lyson.com.pl](http://www.lyson.com.pl)